

M 1:20




Stabliste - Biegeformen

Durchmesser	Abstand	a_s	Verbund- bedingung	C30/37		
$\emptyset$	s			$l_{ot} \geq$	$l_t \geq$	$l_{tr} \geq$
[mm]	[cm]	[-]	[-]	[cm]	[cm]	[cm]
8	≥ 10	1,0	mäßig	45	45	55
	≥ 10	1,0	gut	30	30	40
10	≥ 10	1,0	mäßig	55	55	70
	≥ 10	1,0	gut	40	40	50
12	≥ 10	1,4	mäßig	65	90	115
	≥ 10	1,4	gut	45	65	80
14	≥ 10	1,4	mäßig	75	105	135
	≥ 10	1,4	gut	55	75	95
16	≥ 10	2,0	mäßig	85	165	215
	≥ 10	2,0	gut	60	115	150
20	≥ 10	2,0	mäßig	105	205	270
	≥ 10	2,0	gut	75	145	190
	≥ 10	2,0	mäßig	130	260	335
	≥ 10	2,0	gut	90	180	235
25	≥ 10	2,0	mäßig	145	290	375
	≥ 10	2,0	gut	105	205	265


Achsens 18/D-F

a/b/h=150/275/80cm, C30/37-WU, $C_v=3.5\text{cm}$

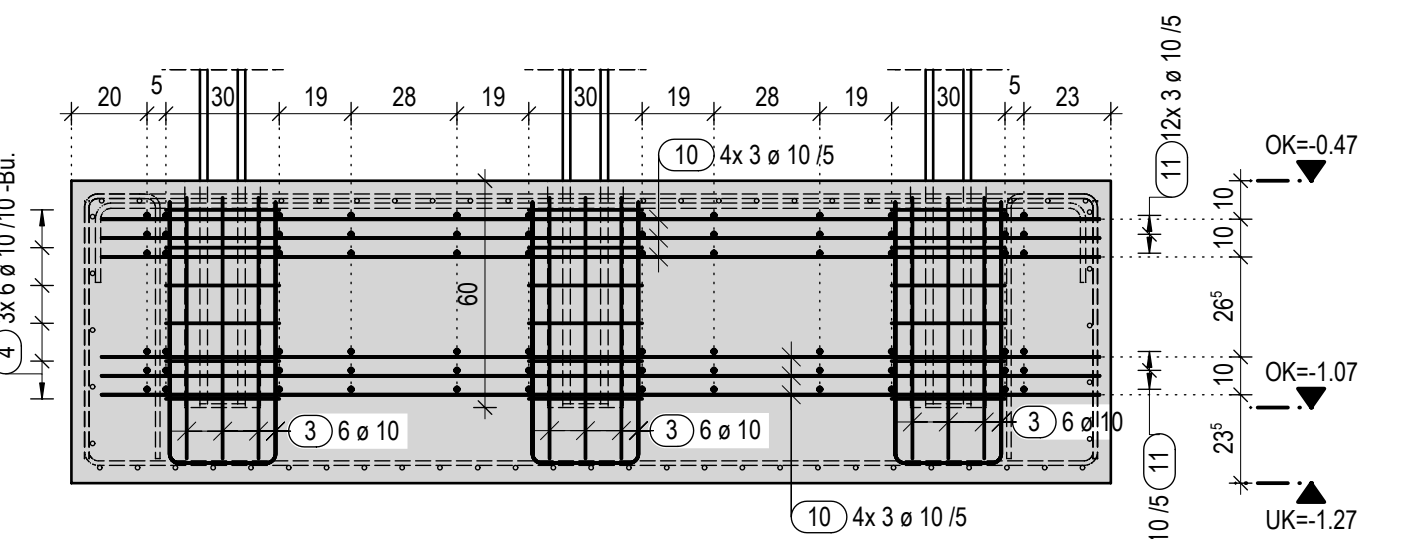

M 1:20

Isometrie

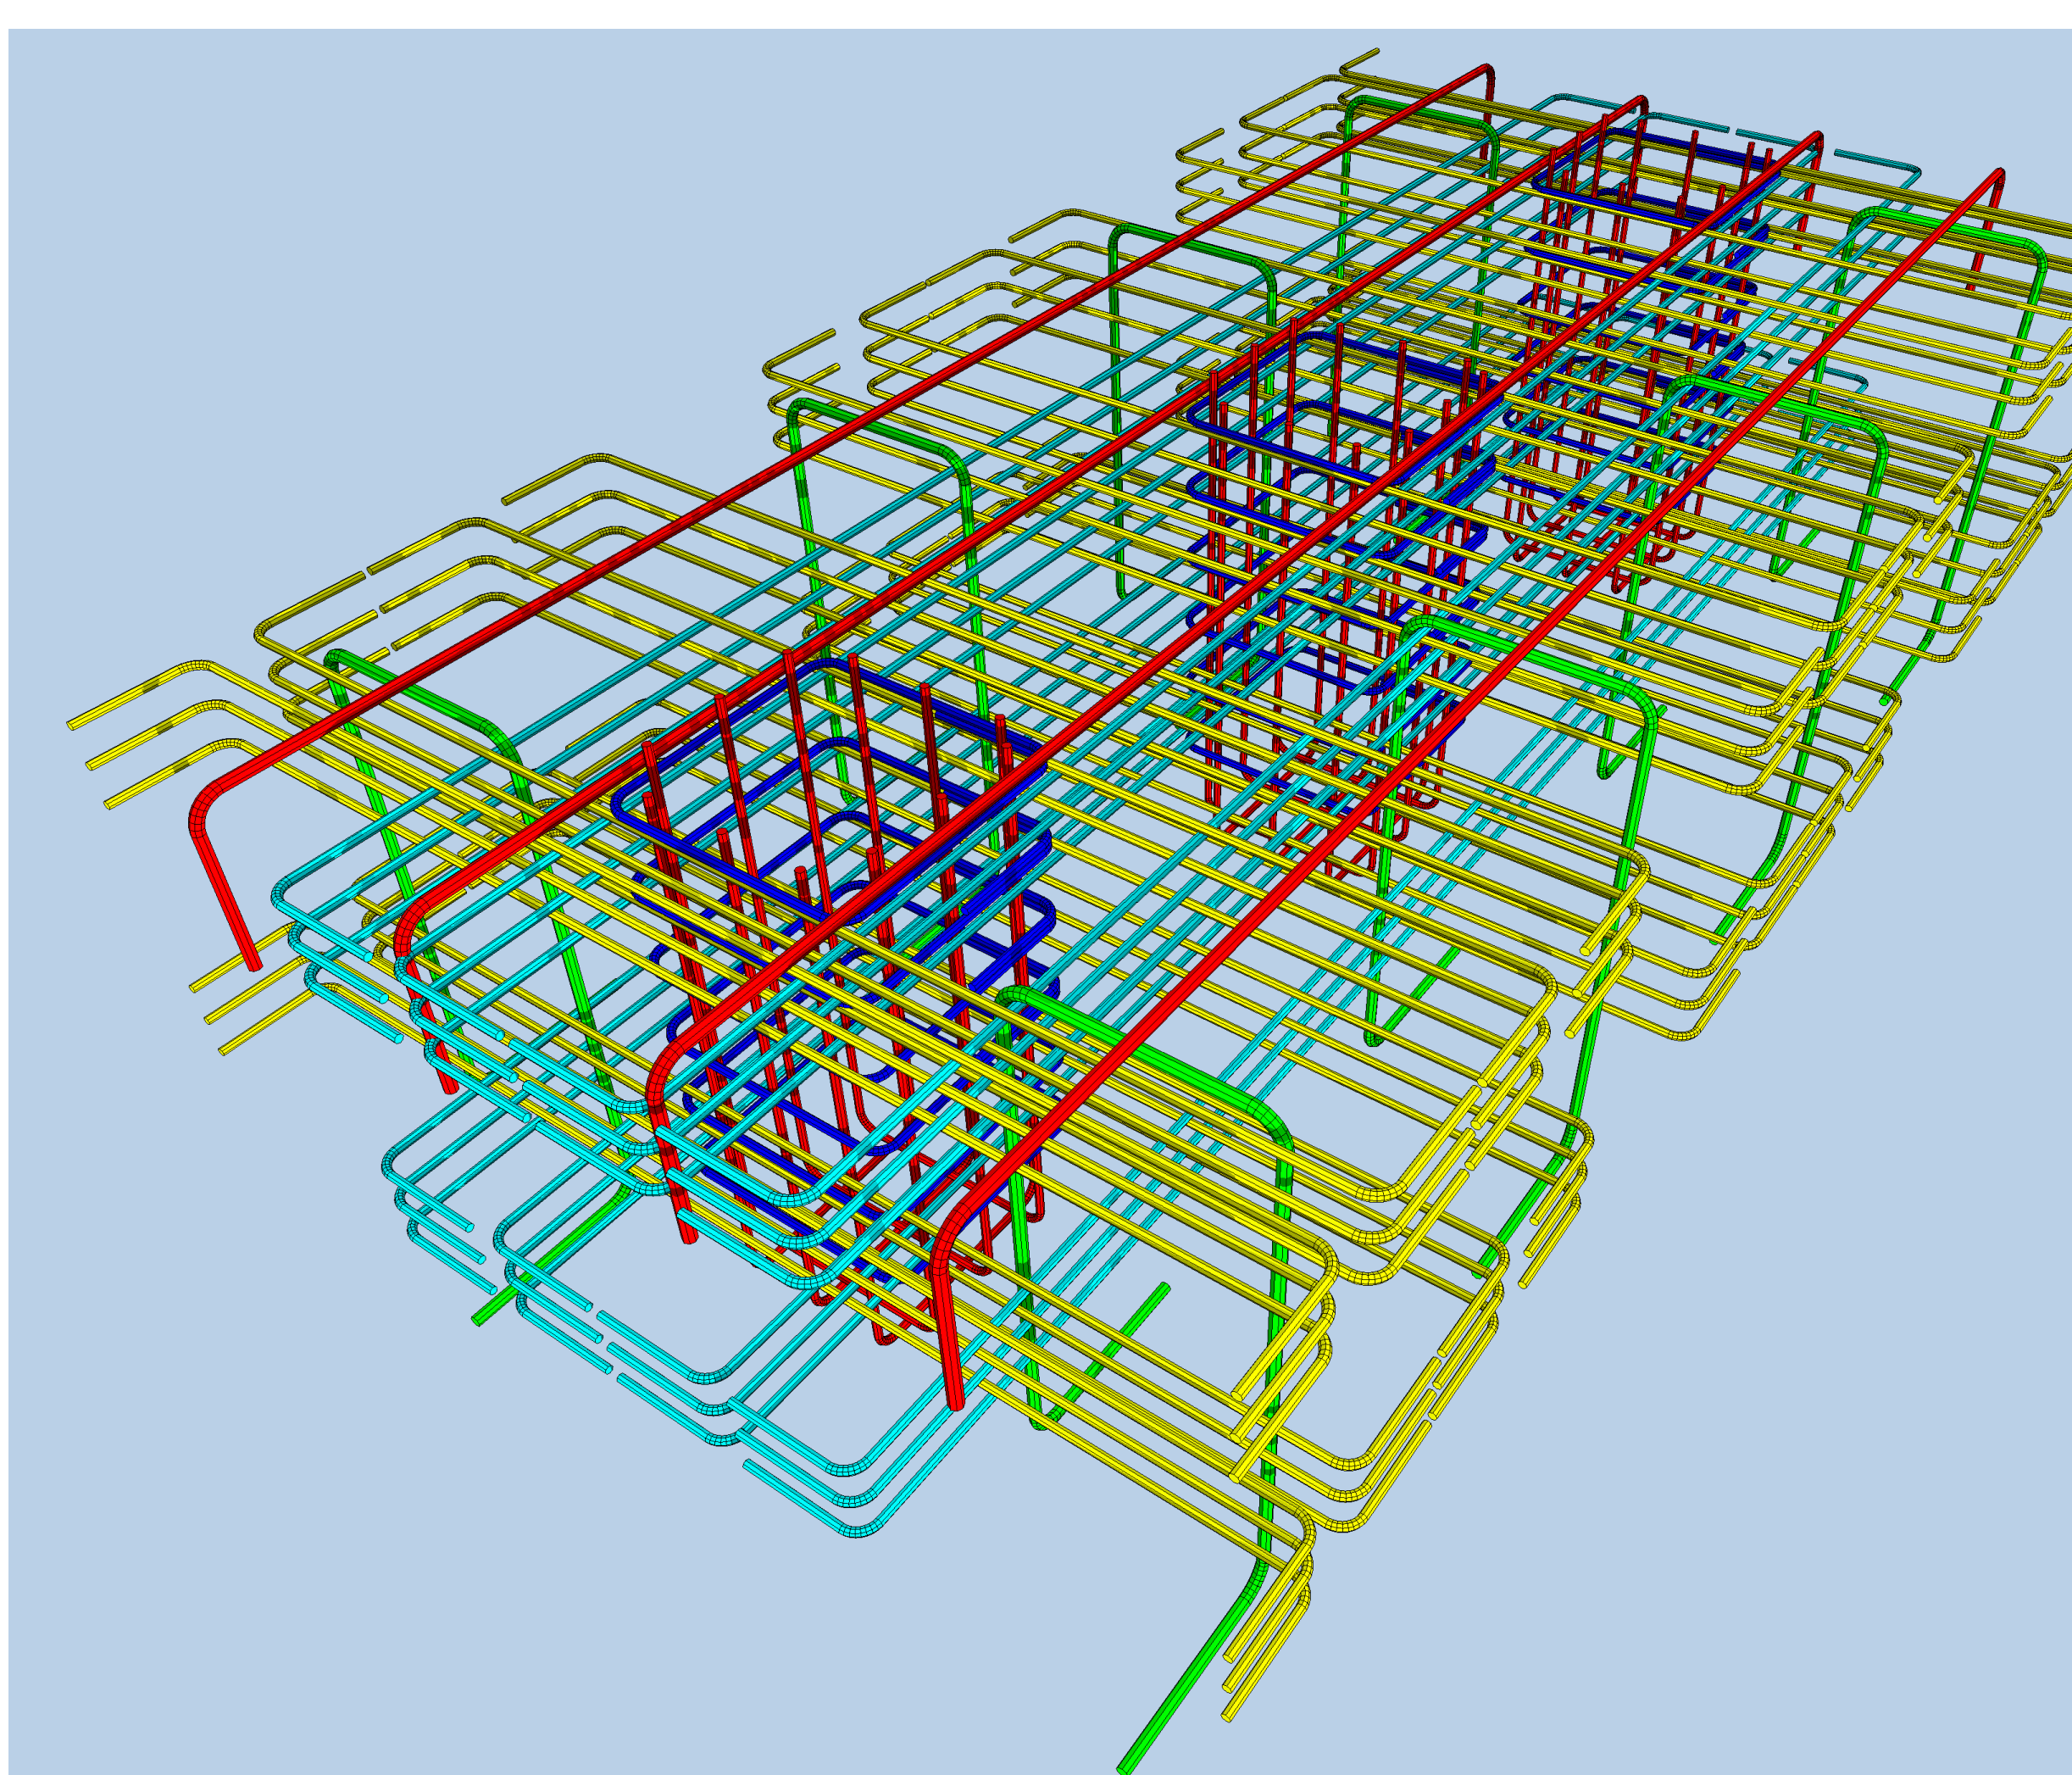[illegible]